

Attorney's Docket No.: 617-010265-US(PAR)

PATENT

IDS



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Express Mail No.: EL627426368US

In re application of: KANTOLA et al.

Serial No.: 0 /

Filed: Herewith

For: COMMUNICATION DEVICES AND METHOD OF COMMUNICATION

Group No.:

Examiner:


Commissioner of Patents and Trademarks
Washington, D.C. 20231

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country : United Kingdom
Application Number : 0010983.5
Filing Date : 5 May 2000

WARNING: "When a document that is required by statute to be certified must be filed, a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 CFR 1.4(f) (emphasis added.)

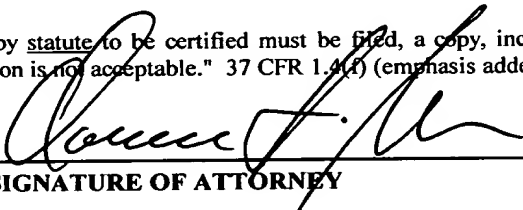
SIGNATURE OF ATTORNEY

Reg. No.: 24,622

Clarence A. Green

Tel. No.: (203) 259-1800

Type or print name of attorney

Customer No.: 2512

Perman & Green, LLP

P.O. Address

425 Post Road, Fairfield, CT 06430

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent if the foreign application is referred to in the oath or declaration as required by § 1.63.

(Transmittal of Certified Copy [5-4])

PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

JC997 U.S. PTO
09/848459



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

W. Evans

Dated 30 March 2001

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

JC997 U.S. PTO
09/848459




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

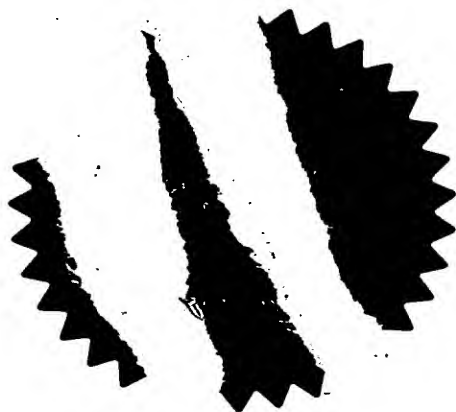


Signed

W. Evans

Dated 30 March 2001

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)

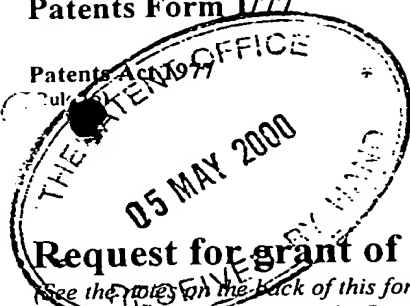

Cardiff Road
Newport NP23 5JF
Gwent NP23 5JF
0845 00 553415-7 002825
F01/7700 0 00-0010983.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

101515/KCS/DG

2. Patent application number

(The Patent Office will fill in this part)

0010983.5

05 MAY 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LTD
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

5911995004

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

COMMUNICATION DEVICES AND METHOD OF COMMUNICATION

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

PAGE WHITE & FARRER
54 DOUGHTY STREET
LONDON
WC1N 2LS
UNITED KINGDOM

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number

Date of filing

(if you know it)

(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing

(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

| | | |
|-------------|----|---|
| Description | 11 | / |
| Claim(s) | 4 | / |
| Abstract | 1 | / |
| Drawing(s) | 3 | 3 |

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.



Signature

Date

5 May 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

KELDA STYLE, 0171-831 7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

5

COMMUNICATION DEVICES AND METHOD OF COMMUNICATION

Field of the Invention

10

The present invention relates to communication devices and a method of communication. In particular, but not exclusively, the present invention relates to wireless communications devices and a method of wireless communications.

Background of the Invention

15

It has been proposed to use mobile stations instead of credit cards at a point of sale. In this proposal, it has been suggested that a wireless link be established between the point of sale device and the mobile station. The mobile station may provide the point of sale device with similar information to that provided by a credit card.

20

25

One problem with this proposal is how to ensure that the correct mobile station is connected to the point of sale device. For example, in a busy supermarket, there may be a large number of point of sale devices and a large number of mobile stations. It is important that the right point of sale device be connected to the right mobile station. Clearly, considerable problems would be caused if the wrong mobile station were connected to the wrong point of sale device. The user of a mobile station could be charged for goods not purchased by the user.

Summary of the Invention

30

It is an aim of embodiments of the present invention to address the above problems.

NC29791

5 According to a first aspect of the present invention, there is provided a communications device comprising means for transmitting a signal to another party; and means for controlling the signal level with which said transmitting means transmits, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

10

The control means may be arranged to control the power of the signal. The control means may be arranged to control the signal level of the transmitted signal to be one of only two levels, the initially low level and the increased level. Alternatively, the signal level may be initially at a starting level and be increased
15 at a relatively low level. The starting point may be no signal. The signal level may be increased until a connection is established with said another party. The signal level may have a maximum value to which it can be increased when no connection has been established with the another party. The maximum value may be less than the signal level used when a connection with another party has been
20 established.

According to a second aspect of the present invention, there is provided a communications device comprising means for receiving a signal from another party; and means for controlling the signal level with which said signal is received,
25 wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

According to a third aspect of the present invention, there is provided a communications method comprising the steps of transmitting initially a signal to
30 another party at a relatively low signal level; establishing a connection with the another party; and increasing the signal level with which signals are transmitted to said another party after said connection has been established.

NC29791

- 5 According to a fourth aspect of the present invention, there is provided a communications method comprising the steps of receiving a signal from another party; attenuating said received signal by a first amount; establishing a connection with the another party; decreasing or removing the attenuation applied to said received signals when a connection has been established.

10

Brief Description of Drawings

For a better understanding of the present invention and as to how the same may be carried into effect, reference will now be made by way of example only to the
15 accompanying drawings in which:-

Figure 1 shows a typical cellular telecommunications network;

Figure 2 shows a block diagram of an embodiment of the present invention;

Figure 3 shows the structure of the mobile station of Figure 2;

- 20 Figure 4 shows a service access point with attenuation of the received and transmitted signals;

Figure 5 shows a service access point with attenuation of the transmitted signals only; and

- 25 Figure 6 shows a service access point with attenuation of the received signals only.

Detailed Description of Embodiments of the Invention

- Reference is made to Figure 1 which shows a typical cellular telecommunications
30 network. The area covered by the network 2 is divided into a plurality of cells 4. Each cell 4 is served by a base transceiver station 6. Each base transceiver station 6 is arranged to communicate with mobile stations 8 in the cell associated with that base transceiver station 6.

NC29791

5 The cellular network 2 can use any suitable method of communication. Known methods of communication include those based on time division multiple access, frequency division multiple access and spread spectrum techniques such as code division multiple access. Hybrids of two or more of these access techniques can also be used. In the following description, the mobile station is described as
10 operating in accordance with the UMTS (Universal Mobile Telephone System) standard, which uses code division multiple access. However, the mobile station can operate in accordance with any other suitable standard, for example GSM (Global System for Mobile Communications). GSM uses a time/frequency division multiple access technique.

15

Reference will now be made to Figure 2 which shows a block diagram of an embodiment of the present invention. Shown in Figure 2 is a service access point 10. The service access point, as will be discussed in more detail later, may be a point of sale device, a ticket gate, an information kiosk, ATM or any other suitable
20 service access point.

The service access point 10 has an antenna 12. The antenna 12 is arranged to receive signals from a mobile station. The received signals are passed to an adjustable attenuator 13. The function of the attenuator 13 will be described in
25 more detail hereinafter. The output of the attenuator 13 is connected to a wireless link 14. The wireless link 14 processes the received signals and puts the received data into a format which can be used by the main part 16 of the service access point. The wireless link may convert the received signal to a base band frequency and may carry out decoding and demodulation, as is well known.

30

The antenna 12 is also arranged to transmit signals to a mobile station. The wireless link 14 receives the data to be transmitted and puts it into a format suitable for transmission. The wireless link 14 may up convert the signals, encode and modulate the data before passing it to the adjustable attenuator 13. The

NC29791

- 5 signals are attenuated, if necessary by the attenuator 13 before being passed to the antenna 12 for transmission.

Figure 2 illustrates how embodiments of the invention are able to overcome the difficulties described earlier. In the arrangement shown in Figure 2, four mobile
10 stations 8a-d are provided. Each of these four mobile stations is reasonably close to the service access point. In the embodiment of the invention, it is desired to establish a connection between the first mobile station 8a and the service access point. It is extremely disadvantageous if, by mistake, a connection were to be established with any of the other three mobile stations 8b to 8d.

15

The service access point 10 is able to adjust, using the adjustable attenuator 13, the power with which the antenna 12 transmits. The service access point is arranged, in preferred embodiments of the present invention to receive and transmit signals in accordance with the Bluetooth standard. The Bluetooth
20 standard uses low power and high frequency signals (of the order of Giga Hertz).

25

If the Bluetooth signal were transmitted with its normal range of power, all of the four mobile stations 8a-d would be able to receive the Bluetooth signal from the service access point and accordingly a connection could be set up with any of the
four mobile stations. To avoid this, the attenuator 13 is controlled so as to transmit initially with a very low power. This power is low enough such that the range of the signal is very small. For example, the signal may have a range of the order of a few centimetres, perhaps 10 or so centimetres. However this is an implementation issue and the initial range of the signals can have any suitable
30 value.

This low level of power is maintained until a mobile station is within the short range of the service access point 10. A Bluetooth connection is then established between the mobile station and the service access point. Once the connection

NC29791

- 5 has been established, the attenuator 13 is controlled to increase the power of the signal transmitted by the antenna to more usual levels. Typically, the signal will then be strong enough to be received by the all of the four mobile stations. However as a connection has already been established with the correct mobile station, no further connection is established with any of the other mobile stations.
- 10 Once a connection has been established, the communication link can optionally be encrypted if desired.

The attenuator 13 may have no attenuation effect on the signal to be transmitted once the connection with the correct mobile station has been established. The

15 attenuator may simply have two modes. In the initial mode, the signal to be transmitted is attenuated by a fixed amount so that the signal has only the very short range A. In the second mode, the attenuator provides no attenuation and the signals have a longer range B. When a connection has been broken, the attenuator reverts to the initial mode.

20

In an alternative embodiment of the present invention, the initially transmitted signals may have the smallest range. If a connection is not established when the service access point is transmitting with the lowest power, the power may be increased by the attenuator until a connection is established. The increase in

25 power may be gradual or stepwise. The power may be gradually increased from nothing. The attenuator may be controlled so that the signals are transmitted with up to a maximum power when no connection has been established. The maximum power may be the same as the power used when a connection has been established. However in preferred embodiments of the present invention,

30 the maximum power is less than the power used when a connection has been established.

In preferred embodiments of the present invention, the attenuator has no effect on the received signals, only on the signals to be transmitted. However in

NC29791

- 5 alternative embodiments of the present invention the attenuator may attenuate the received signals some or all of the time.

10 The structure of the mobile station 8 is shown in Figure 3. The mobile station 8 has a first antenna 20 and a second antenna 22. The first antenna 20 is connected to a UMTS transceiver 24. The UMTS transceiver 24 is arranged to receive signals from the antenna 20 at a UMTS frequency. The UMTS transceiver 24 decodes the signals, demodulates them and also reduces them to the base band frequency. The output of the UMTS transceiver 24 thus consists of a stream of data. That stream of data may require further processing by the processor 26.

15

The UMTS transceiver also receives data from the processor 26 which is to be transmitted by the mobile station. The UMTS transceiver 24 encodes, modulates and up converts the signal to the radio frequency which is to be used. The radio frequency signal is then transmitted by the antenna 20.

20

The second antenna 22 is connected to a Bluetooth transceiver. Bluetooth is a proposed new standard that uses relatively low power radio frequency signals. The frequency may be in the GHz range. This is quite different to the UMTS frequencies. For this reason, separate antennas 20 and 22 are usually provided
25 for the two different types of signal. The Bluetooth transceiver 28 receives Bluetooth frequency signals from the second antenna 22 and decodes, demodulates and down converts those signals. The data output by the Bluetooth transceiver 28 is input to the processor 26. The processor 26 is also arranged to provide data to the Bluetooth transceiver 28 which is to be transmitted by the
30 Bluetooth antenna 22. This data is up converted to the Bluetooth frequency, modulated and encoded before being transmitted by the second antenna 22.

The mobile station 8 also has a display 30. The display is controlled by the processor 26 and provides information for the user. A keypad 32 is provided to

NC29791

5 allow the user to input numbers and other information. The information input via the keypad 32 is input to the processor 26 which may be controlled in accordance with the input information. The mobile station has a speaker 34. This is controlled by the processor 26 and outputs audio signals which can be heard by the user. A microphone 36 is provided to pick up the user's voice. The microphone signals
10 are input to the processor 26 which converts the signals into a format suitable for output to the UMTS transceiver 24.

Reference will now be made to Figures 4, 5 and 6. In Figure 4, the service access point 10a is arranged to attenuate signals that are both received and transmitted
15 by the antenna 13a. The signals to be transmitted are input to a duplex filter 50. The transmit signals are output by a wireless link, as shown in Figure 2 to the duplex filter 50. The signals to be transmitted are attenuated by the attenuator 13a as described in relation to Figure 2 before being transmitted by the antenna 12.

20

The signals, which are received by the antenna 12, are also input to the attenuator 13a which attenuates them. This means that signals from mobile stations further away from the service access point are not output from the attenuator or have a very low power. The attenuator 13a can be controlled to
25 attenuate the received signals in a similar way to that described in relation to the transmitted signals. The attenuation of received signals may therefore be greater when the connection is being established and less when the connection has been established.

30 Reference is made to Figure 5 which shows for comparative purposes part of the arrangement of Figure 2. The service access point 10b is arranged to attenuate only the transmitted signals. The signals to be transmitted are attenuated by the attenuator 13b after the wireless link circuitry and before the signals are input to the duplex filter 50.

NC29791

5

Reference is made to Figure 6 which shows a service access point 10c where only the received signals are attenuated. The attenuator 13c is arranged to received signals received by the antenna 12 via the duplex filter 50. The attenuator attenuates the signals which are received before they are processed
10 further. The attenuator may be controlled in a similar manner to the attenuator described in relation to Figure 2. When a connection is established the received signals are attenuated to remove the signals other than from a very close mobile station. The attenuation may be removed or reduced once a connection has been established,

15

The preferred embodiments of the present invention have been described as using a Bluetooth link. However, it should be appreciated that any other suitable radio frequency can be used. For example, infrared frequencies may be used. Preferred embodiments of the present invention use a short range connection
20 between the mobile station and the service access point. However, this may not be required in certain embodiments of the present invention.

25

Embodiments of the present invention have a number of different applications. In one embodiment, the mobile station is used to make a transaction a point of sale or similar device and effectively acts as a credit card, a debit card or an electronic
purse. Credit card information for money transfer is provided to the point of sale or similar device using the Bluetooth connection link which is established between the service access point and the mobile station. For example once the link has been established, the mobile station provides the point of sale device with credit
30 card details of the user and authorisation for the transaction. Other information such as the identity of the user may also be provided.

Embodiments of the present invention can for example be used at ticket gates. The mobile station includes a ticket to go to a film, concert, sports match or the

NC29791

5 like. The Bluetooth connection is established between the mobile station and the ticket gate using the identification information. The confirmation of the ticket details is then provided to the ticket gate from the mobile station via the Bluetooth link.

10 Embodiments of the invention can be used to obtain information from an information station. The link is established and the information is exchanged using the Bluetooth connection. For example, the user can obtain train times etc from the information kiosk.

15 In an alternative embodiment of the present invention, the mobile station can be used to communicate with an automatic teller machine ATM to complete financial operations such as the loading of cash to an electronic purse, the withdrawal of cash or the like. The secure communication link between the station and the ATM is established with the ATM as discussed hereinbefore.

20 In some embodiments of the present invention, the mobile station may be arranged to act solely as a credit card or the like. In that case the UMTS circuitry can be omitted. The mobile station may thus include only the Bluetooth related circuitry. The display, keypad, speaker and/or microphone may therefore be
25 omitted.

The described embodiments of the present invention have used a technique for establishing a connection between a service access point and a mobile station. It should be appreciated that embodiments of the present invention can be used to
30 establish communication between any two or more communication devices. For example, embodiments of the present invention can be used to establish a connection between two or more mobile stations.

NC29791

- 5 In preferred embodiments of the present invention, the mobile station may be replaced by any suitable communication device. Likewise the service access point can be replaced by any suitable communication device. In some embodiments of the present invention the communication capabilities of the communication device and/or the service access point may be very limited. In
- 10 alternative embodiments of the present invention, the communication capabilities of the communication device and/or the service access point may be more extensive.

- In some embodiments of the present invention, the antenna of the service access
- 15 point may be omni directional. In other embodiments of the present invention, the antenna may be directional.

- The normal range of the antenna of the service access point may be of the order of 10 meters. However this is an implementation issue and the normal range may
- 20 be any suitable value.

NC29791

5 CLAIMS

1. A communications device comprising:
means for transmitting a signal to another party; and
means for controlling the signal level with which said transmitting means
10 transmits, wherein said signal level is initially relatively low and when a connection
is established with said another party, said signal level is increased.
2. A communications device as claimed in claim 1, wherein said control
means is arranged to control the power of said signal.
- 15 3. A communications device as claimed in claim 1 or 2, wherein said control
means is arranged to control the signal level of the transmitted signal to be one of
only two levels, the initially relatively low level and the increased level.
- 20 4. A communications device as claimed in claim 1 or 2, wherein said signal
level is initially at a starting level and is increased to the relatively low level.
5. A communications device as claimed in claim , wherein said starting point
is no signal.
- 25 6. A communications device as claimed in claim 1, 2, 4 or 5, wherein said
signal level is increased until a connection is established with said another party.
7. A communications device as claimed in claim 6, wherein said signal level
30 has a maximum value to which it can be increased when no connection has been
established with said another party.

NC29791

5 8. A communications device as claimed in claim 7, wherein said maximum value is less than the signal level used when a connection with the another party has been established.

9. A communications device comprising:

10 means for receiving a signal from another party; and
means for controlling the signal level with which said signal is received, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

15 10. A communications device as claimed in claim 9, wherein said control means is arranged to attenuate the signal level of the received signal by a first amount or a second amount only to provide the initially relatively low level and the increased level.

20 11. A communications device as claimed in claim 9, wherein said signal is arranged to be attenuated by a starting amount and the attenuation is reduced to provide signals at the relatively low level.

25 12. A communications device as claimed in claim 11, wherein said starting point is maximum attenuation.

13. A communications device as claimed in claim 9, 11 or 12, wherein attenuation of the received signal level is decreased until a connection is established with said another party.

30

14. A communications device as claimed in claim 13, wherein said attenuation has a minimum value to which it can be decreased when no connection has been established with said another party.

NC29791

- 5 15. A communications device as claimed in claim 14, wherein said minimum value is greater than the attenuation used when a connection with the another party has been established.
- 10 16. A communications device as claimed in any of claims 9 to 15, wherein no attenuation is applied to the received signals when a connection has been established.
- 15 17. A communications device as claimed in any preceding claim, wherein said control means comprises an attenuator.
18. A communications device as claimed in any preceding claim, wherein when a plurality of another parties are provided, said communications device is arranged to establish a connection with the closest another party.
- 20 19. A communications device as claimed in any preceding claim, wherein said communications device is one of the following devices:
point of sale device; ticket gate device; and information kiosk; ATM.
- 25 20. A communications device as claimed in any preceding claim, wherein said connection with said another party is a wireless connection.
21. A communications device as claimed in claim 20, wherein said wireless connection is a high frequency connection.
- 30 22. A communications device as claimed in claim 21, wherein said high frequency connection is of the order of giga Hertz.
23. A communications device as claimed in claim 22, wherein said wireless connection is a Bluetooth link.

NC29791

5

24. A communications device as claimed in claim 20, wherein the wireless connection is an infrared connection.

25. A communications device as claimed in any preceding claim, wherein said
10 another party is a mobile telephone.

26. A communications method comprising the steps of:
transmitting initially a signal to another party at a relatively low signal level;
establishing a connection with the another party; and
15 increasing the signal level with which signals are transmitted to said
another party after said connection has been established.

27. A communications method comprising the steps of:
receiving a signal from another party;
20 attenuating said received signal by a first amount;
establishing a connection with the another party;
decreasing or removing the attenuation applied to said received signals
when a connection has been established.

ABSTRACT

COMMUNICATION DEVICES AND METHOD OF COMMUNICATION

10 A communications device comprising means for transmitting a signal to another party; and means for controlling the signal level with which said transmitting means transmits, wherein said signal level is initially relatively low and when a connection is established with said another party, said signal level is increased.

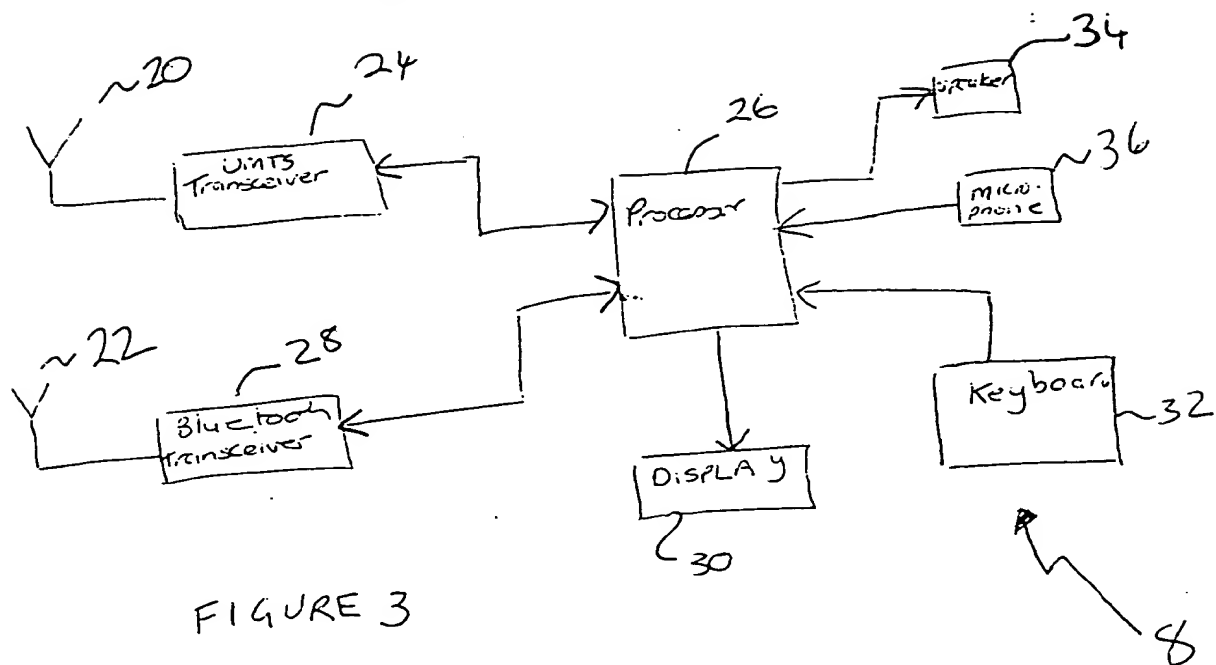


FIGURE 3

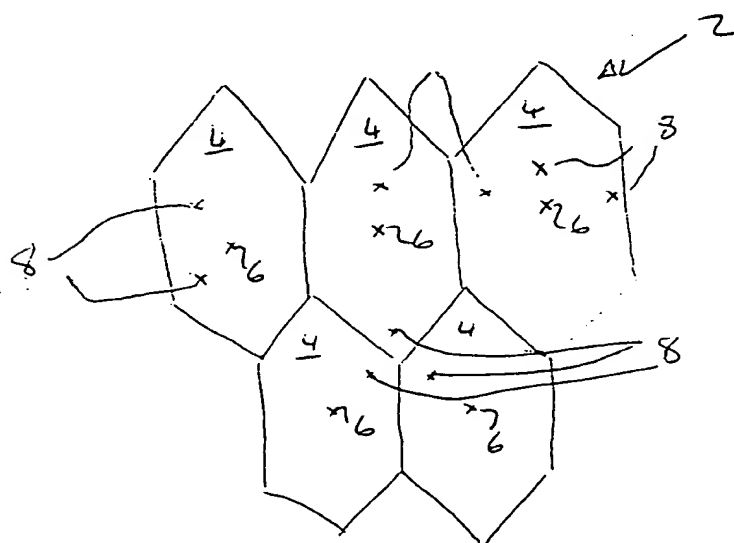


FIGURE 1

THIS PAGE BLANK (USPTO)

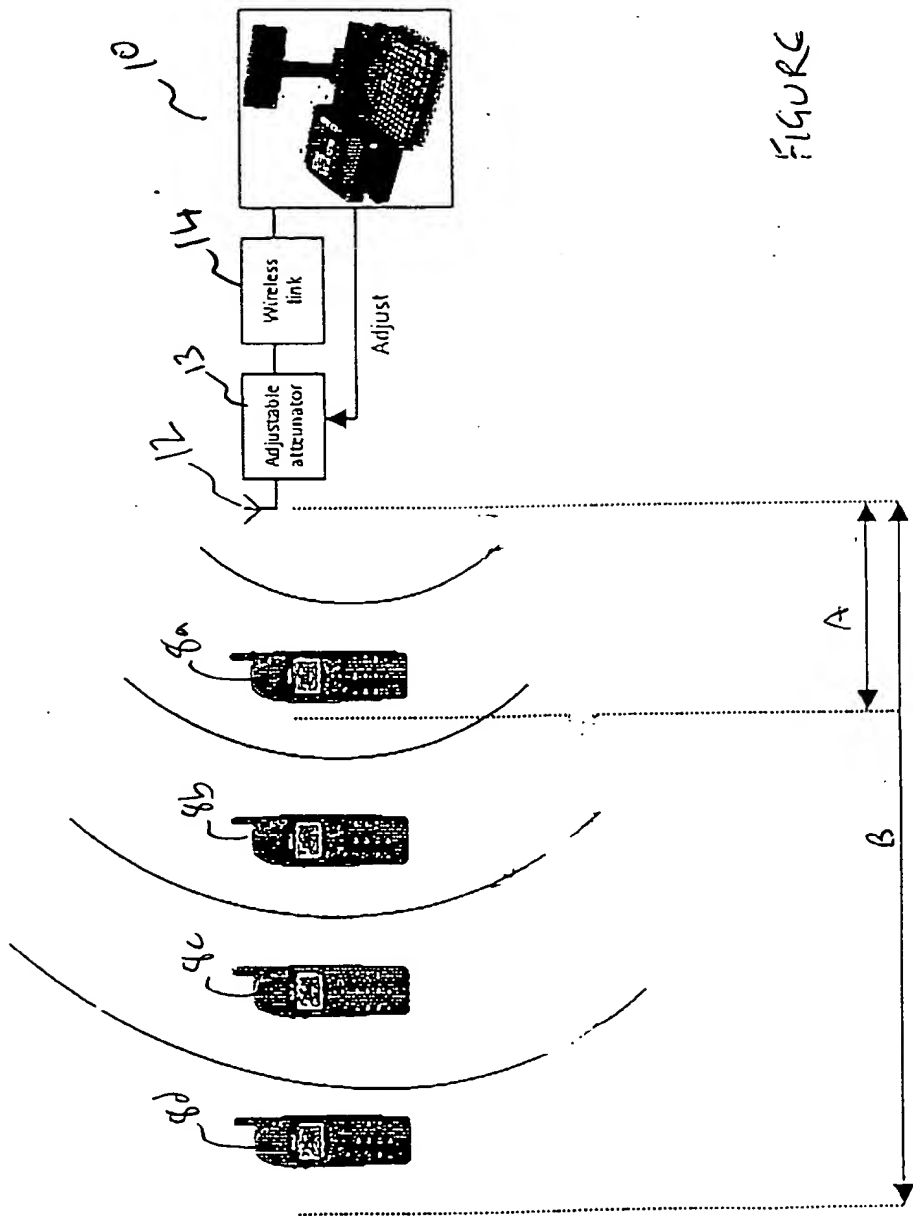


FIGURE 2

THIS PAGE BLANK (USPTO)

Both :

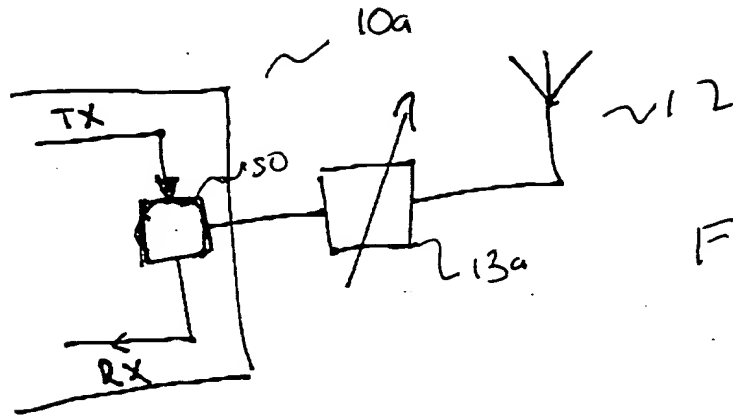


FIGURE 4

TX :

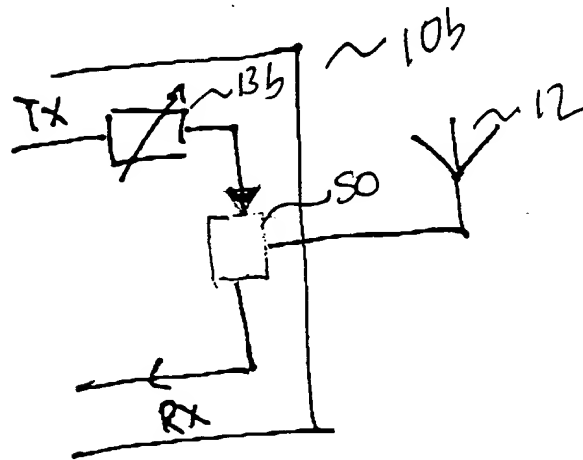


FIGURE 5

RX :

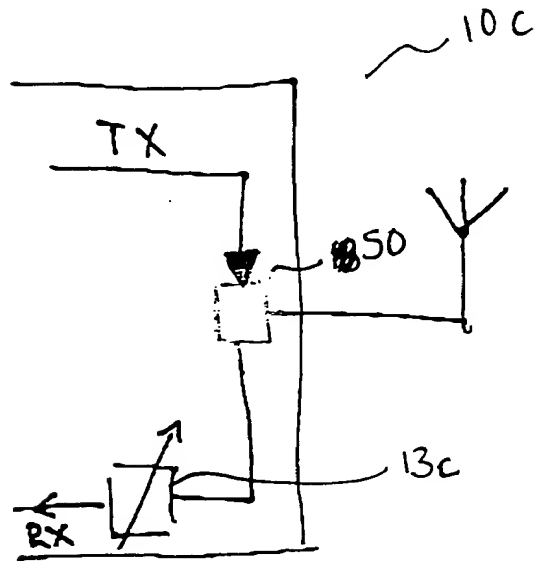


FIGURE 6

THIS PAGE BLANK (USPTO)